36" Under Cabinet Hood

UXT3036AY

Key Features

- Vented Under Cabinet Hood **(New Design)**
- Axial Fan
- Covered, Incandescent Light (75-Watt)
- 2-Speed, Rocker Switch Control
- Washable, Grease Filter
- Vertically Exhausts up to 190 CFM with a 3 1/4" x 10" Rectangular Duct

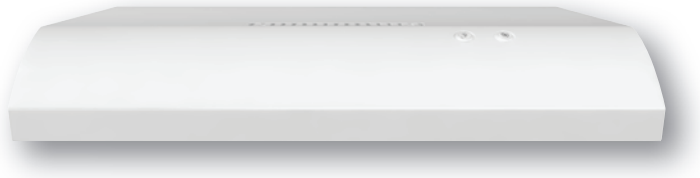

36" Under Cabinet Hood

UXT3036AY

Specifications

MODEL NO.	UXT3036AY
Type	Vented
DUCT TYPE	
Rectangular 3 1/4" x 10"	Yes
Washable Grease Filter	Yes
VERTICAL CFM	
3 1/4" x 10" Rectangular	182
HORIZONTAL CFM	
3 1/4" x 10"	191
VERTICAL SONES	
3 1/4" x 10" Rectangular	5.8
GENERAL INFORMATION	
Horizontal Sones	5.3
Control	2-Speed, Rocker Switch
Adapter/Vent Connector	Included
Blower	Axial Fan
Lighting	1 Level, Incandescent (75-Watt)
Title 24 Compliant	Yes
Range/Cooktop Compatibility	Up to 40K BTU
Approx. Shipping Weight (lbs.)	13
OPTIONAL ACCESSORIES	
Power Cord	W10355452
3 1/4" x 10" Rectangular Damper Kit	W10398259
COLOR AVAILABILITY	**W,B**

Note: CFMs are based on IEC standard

* W-White, B-Black

Dimensions

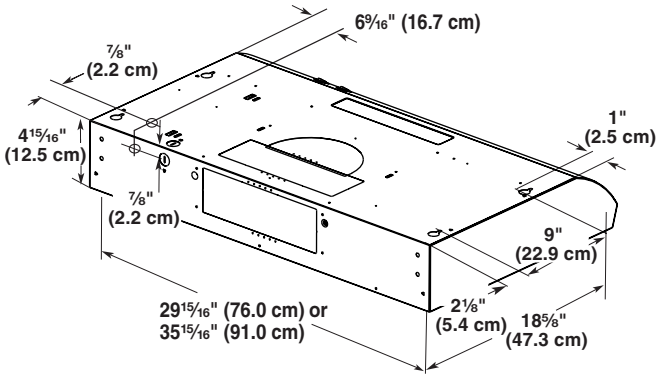

Installation Requirements

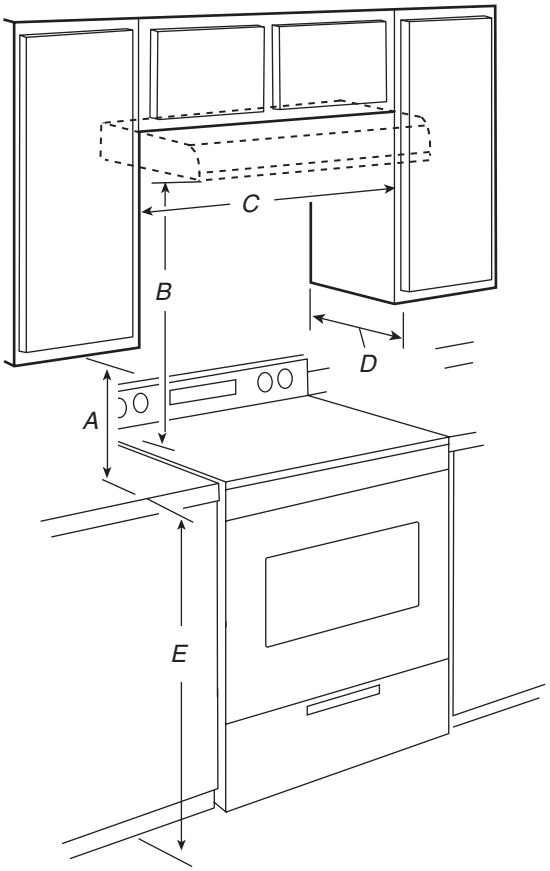

A. 18" (45.7 cm) min. clearance - upper cabinet to countertop

B. 18" (45.7 cm) to 24" (61.0 cm) suggested max. - bottom of range hood to cooking surface

C. 30" (76.2 cm) min. cabinet opening width for 30" (76.2 cm) models and 36" (91.4 cm) min. cabinet width for 36" (91.4 cm) models.

D. 13" (33.0 cm) cabinet depth

E. 36" (91.4 cm) base cabinet height

Dimensions are for planning purposes only.
For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

®Registered trademark/™ Trademark of Whirlpool, U.S.A. ©2011. All rights reserved.